

# IST UV UNITS FOR CRABTREE MARQUESS



It is important to maximise the production possibilities that new automation provides. IST UV solutions are designed with optimum reliability as a priority and this is achieved by incorporating outstanding heat management possibilities and total production flexibility.

## THE UV PACKAGE FOR CRABTREE MARQUESS

### NO PRESS MODIFICATIONS

Press modifications and extensions between printing decks are not required with IST UV interdeck units.


### URS® INLAY REFLECTOR TECHNOLOGY

URS® reflectors are what are known as cold mirror reflectors, fitted with more than 60 different metal oxide layers that only reflect the UV light and deflect the thermal radiation to a water-cooled profile. These highly resistant reflectors boast an extremely long service life and optimum heat management.

The reflector inlays are force-fitted to the unit, facilitating an easy replacement of the half shells. For example, simple replacement of the reflectors is interesting if the curing result can be improved by a different reflector geometry or coating for specific printing jobs.

### FLC® QUICK- CHANGE LAMPS

The cordless FLC® UV lamp system enables lamps to be changed quickly and easily. It is possible to remove the UV lamp from the lamp unit with just one hand movement and a lamp replacement just takes a few seconds, thus saving users several hours of machine availability per year.

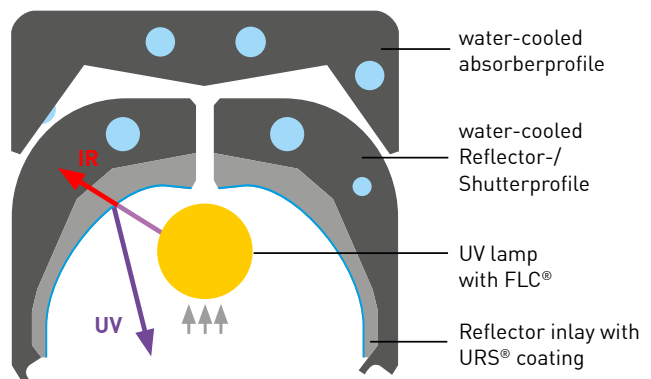

URS® Reflector technology

## UV INTERDECK CURING

- UV-unit placed on support brackets over sheet-transport system
- Unit to pull-out for easy access
- Plug-in power connections on the drive side

## FLEXIBLE INTERCHANGE OF UV INTERDECK UNITS

When required, the UV interdeck units can be moved to different positions. A mechanical pre-paration of the respective printing station ensures easy movability.

## OPERATOR FRIENDLY 'CONTROL SYSTEM'

Complete operation of the UV unit is managed by the UCS control terminal, which is installed adjacent to the control desk of the press.

## COOLING SYSTEM

Water-cooling of the shutters and reflectors ensures that excess heat is efficiently carried out of the press. Also, the integrated air-cooling provides for optimized output of the UV lamp as well as removing small traces of ozone.

## ELECTRONIC POWER SUPPLY DEVICES


Linked to the printing speed, the ELC® controller can continuously adjust the lamp output between around 30 and 100%. In standby mode, the power is automatically reduced to a minimum.

## ALSO IN OUR PROGRAMME

- UV Set-Stack units
- UV Undercure units
- UV Pre-Coater



Typical Set-Stack Unit

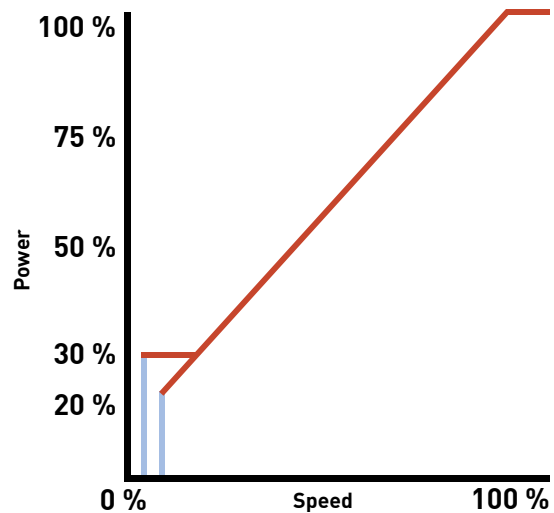

Electrical lamp control (ELC®) for highest demands and best energy savings in UV printing

## WE HAVE THE CURE

IST METZ GmbH & Co. KG  
Lauterstraße 14–18 | 72622 Nürtingen | Germany  
Tel.: +49 7022 6002-0 | Fax: +49 7022 6002-76  
E-Mail: info@ist-uv.com

IST France Sarl | info@fr.ist-uv.com  
IST (UK) Limited | info@uk.ist-uv.com  
IST America – U.S. Operations, Inc. | info@usa.ist-uv.com  
IST Italia S.r.l. | info@it.ist-uv.com  
IST Benelux B.V. | info@bnl.ist-uv.com

IST METZ UV Equipment China Ltd. Co. | info@cn.ist-uv.com  
UV-IST Ibérica SLU | info@es.ist-uv.com  
IST Nordic AB | info@se.ist-uv.com  
IST METZ SEA Co., Ltd. | info@th.ist-uv.com